

PRODUCT DATA SHEET

VARMSSEN® GLUE

Technical data


Bulk density	≤ 1600	g/dm ³
Compressive strength	CS IV	
Absorption of water	Class W0	
Water vapor permeability, μ	≤ 15	
Adhesion	≥ 0.08	N/mm ² FP B
Thermal conductivity (average tabular value; P=50%), λ _{10 dry}	0.61	W/m×K
Bag size	20	Kg
Consumption, 2mm (per bag)	2.5	m ²
Shelf life	12	Months
Pouring temperature	+5 to +25	°C
Opening time at +20°C	60	Minutes
Added water (per bag)	5.0	L
Classification reaction to fire (EN 13501-1 + A1)	Class A1	
HS Tariff Number (Harmonized Commodity Description and Coding System)	3824.50.90	
Colour	Grey	

SKAMOL Eastern Europe Sp. z o.o.

Ul. Innowacyjna 5, 41-200 Sosnowiec, Poland
T: +48 327 937 029 E: easterneurope@skamol.com

KRS 0000270417, PL6282148069

PRODUCT DATA SHEET
VARMSSEN® GLUE

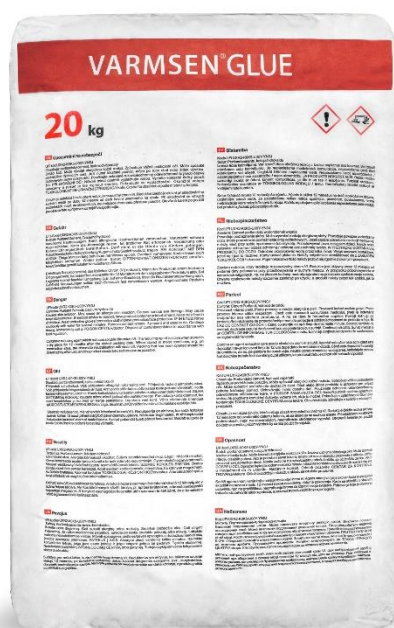

Data are average results of tests conducted under standard procedures and are subject to variation. Data contained in this data sheet are supplied in good faith as a technical service and are subject to change without notice. Misprint and errors excepted. Revision number: 1.7.2025

SKAMOL Eastern Europe Sp. z o.o.

Ul. Innowacyjna 5, 41-200 Sosnowiec, Poland

T: +48 327 937 029 E: easterneurope@skamol.com

KRS 0000270417, PL6282148069